


O² 2000

AUTOMATIC SEALING MACHINE



SECTORS

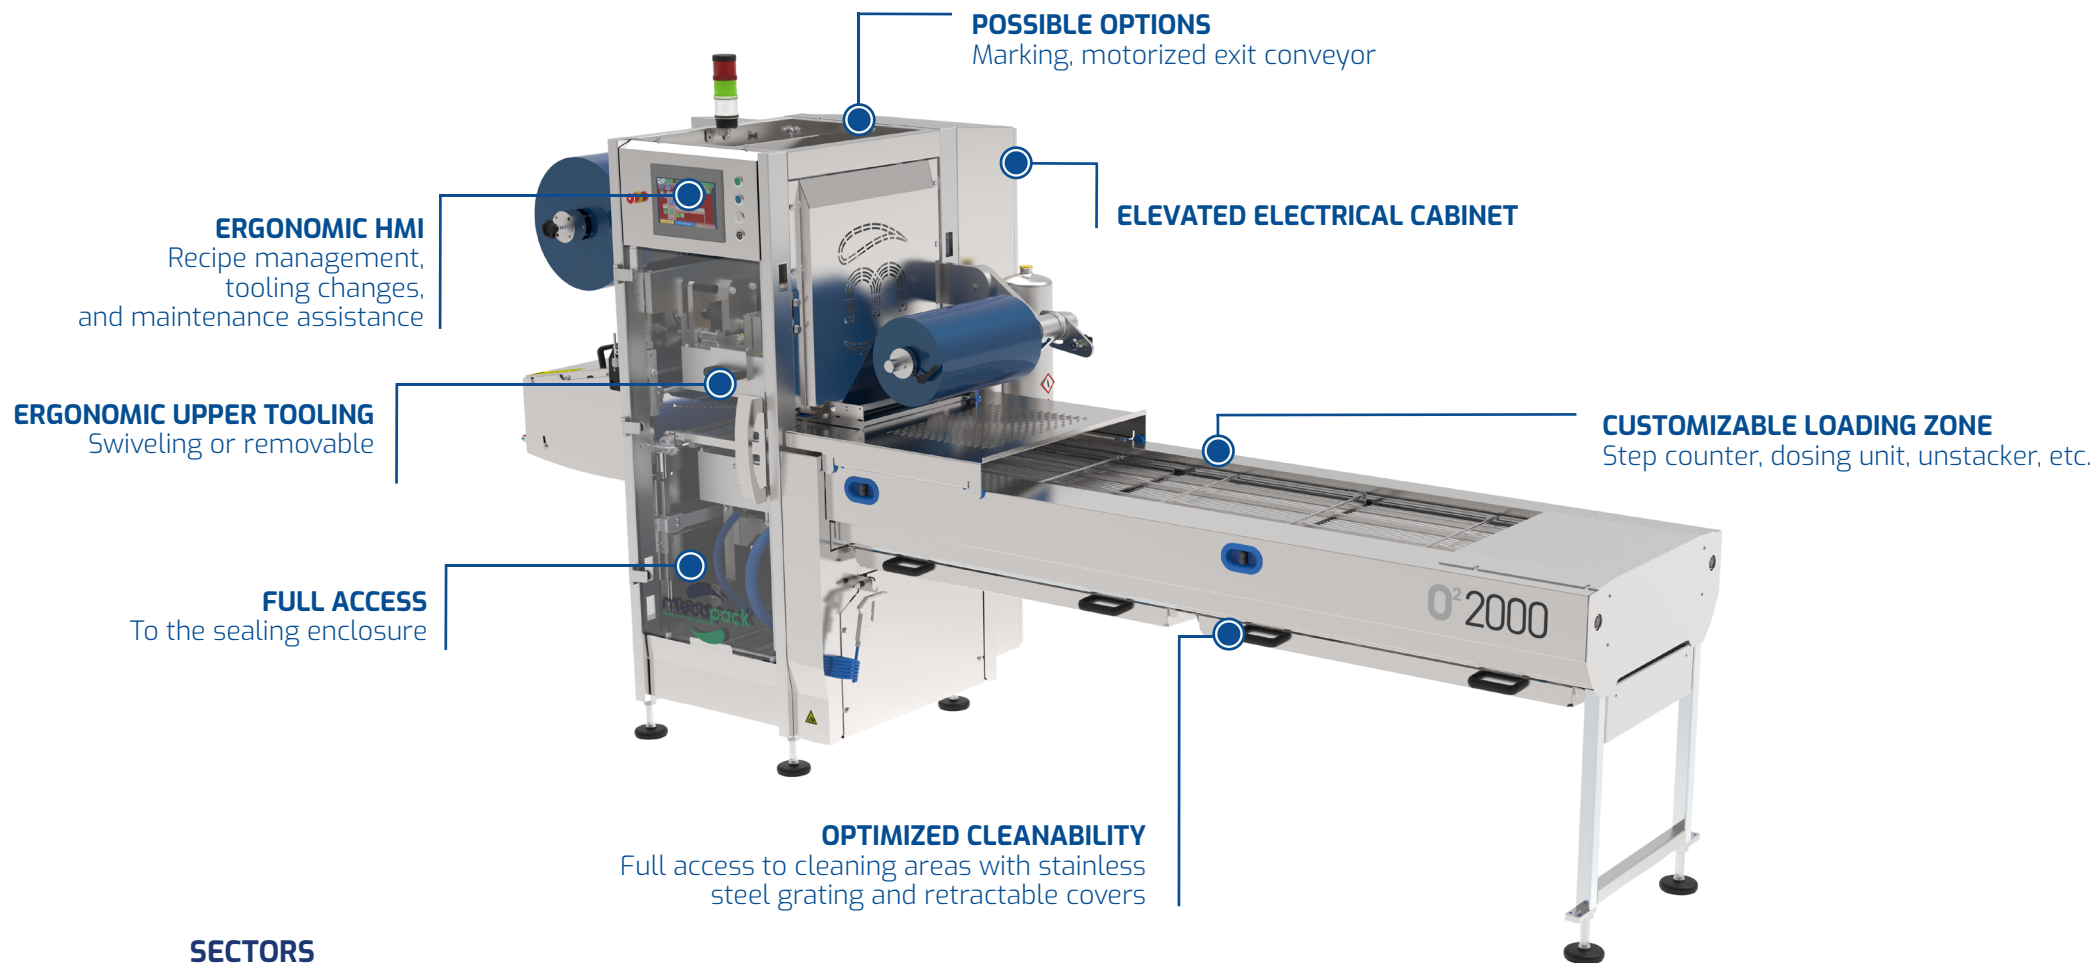

O² 2000

Designed for versatile and flexible industrial production

The O² 2000 is a new-generation sealing machine, engineered for demanding industrial applications with MAP and SKIN versatility, enhanced hygiene, and optimized ergonomics.

Available in Base model (STD), High Skin (HSK), and Flat Skin (FSK) versions, it adapts to all applications while maintaining performance and reliability.

Engineered for easy maintenance and cleaning, it ensures optimal user comfort.

CONFIGURATIONS :

STD

- **MAP** : trays
- **SKIN** : with products protruding up to 25mm

HSK

- **MAP** : trays
- **SKIN** : upper film preheating allowing Skin on trays with products protruding up to 50 mm

FSK

- **MAP** : trays and plates
- **SKIN** : trays and plates for Skin protruding up to 50mm

TRAY CAPACITY :

Number of lanes	1	2	3
Length (mm)	420	325	325 160*
Width (mm)	325	200	125 130*
Maximum height (mm)	100	100	100
*Possibility 3x GN 1/8			

12
CYCLES PER
MINUTE

SPEED :

Up to

12
CYCLES PER
MINUTE



PACKAGING PROCESS

SIMPLE SEALING, MODIFIED ATMOSPHERE
PACKAGING BY VACUUM AND GAS OR
FLUSHING, SKIN, SLICEPACK



MATERIALS

PET, PP, PSE, PLA, CARDBOARD, CELLULOSE,
AND ALL TYPES OF CONTAINERS: TRAY, PLATE,
SINGLE-USE AND REUSABLE, ...



PERIPHERALS

UNSTACKER, THERMAL MARKING,
MOTORIZED OUTPUT, DOSING UNIT, ...