

O² 2500 HSK



DESIGNED FOR HIGH-OVERHANG SKIN APPLICATIONS



DRIVE CHAINS DEVICE WITH INTEGRATED FILM PREHEATING

INDUSTRIAL PLC CONFIGURATION

with touch screen including recipe parameter, tool change procedure and maintenance support.

HIGH SKIN PROCESS

up to 4" product high.
Sealing & MAP compatibility

CUSTOMIZABLE LOADING ZONE

Configurable loading area with loading extension, integrated scale, denester, dosing unit.

SECTORS




Contact : sales.admin@mecapack.com - www.mecapack.com

O² 2500 HSK

SKIN Mastery for High-Overhang Products

Ideal for SKIN applications with significant overhang, the O² 2500 HSK offers versatility across processes and materials, compatible with all container types (trays, boards, etc.). This automatic tray sealer delivers up to 8 cycles per minute in SKIN mode, with film preheating and the ability to handle products over 95 mm, compatible with vacuum and gas flushing.

Designed for the food industry, it features integrated tooling and operator-friendly functions: infeed alignment, automatic loading, marking and printing, and an electric tray/board depiler.

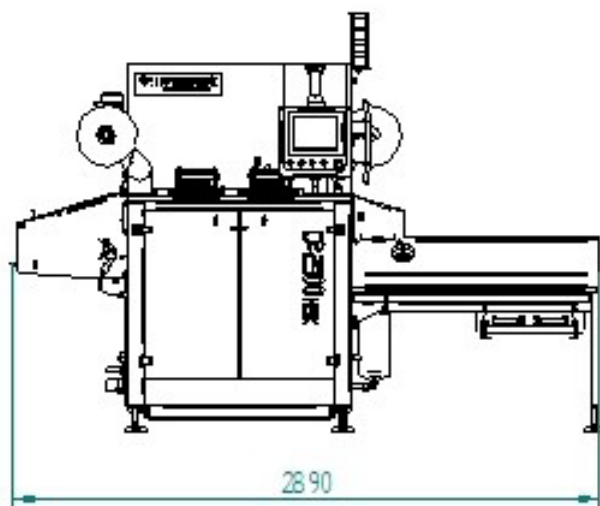

	SPEED : UP TO	
	Number of lanes	
	1	2
	8 CYCLES PER MINUTE	
Lenght (mm)	320	250
Width (mm)	250	180
Height (mm)	100	100



O² 2500 HSK PACKAGING



SEALING PROCESSES

SKIN WITH FILM PREHEATING, PRODUCT OVERHANG UP TO 95 MM, COMPATIBLE WITH VACUUM AND GAS FLUSHING



CUTTING PROCESSES

INSIDE CUT
OUTSIDE CUT



MATERIALS

PET, PP, PSE, PLA, CARDBOARD, CELLULOSE, AND ALL TYPES OF CONTAINERS: TRAY, PLATE, SINGLE-USE AND REUSABLE, ...