


O² 1500



DRAWER-TYPE TRAY SEALER

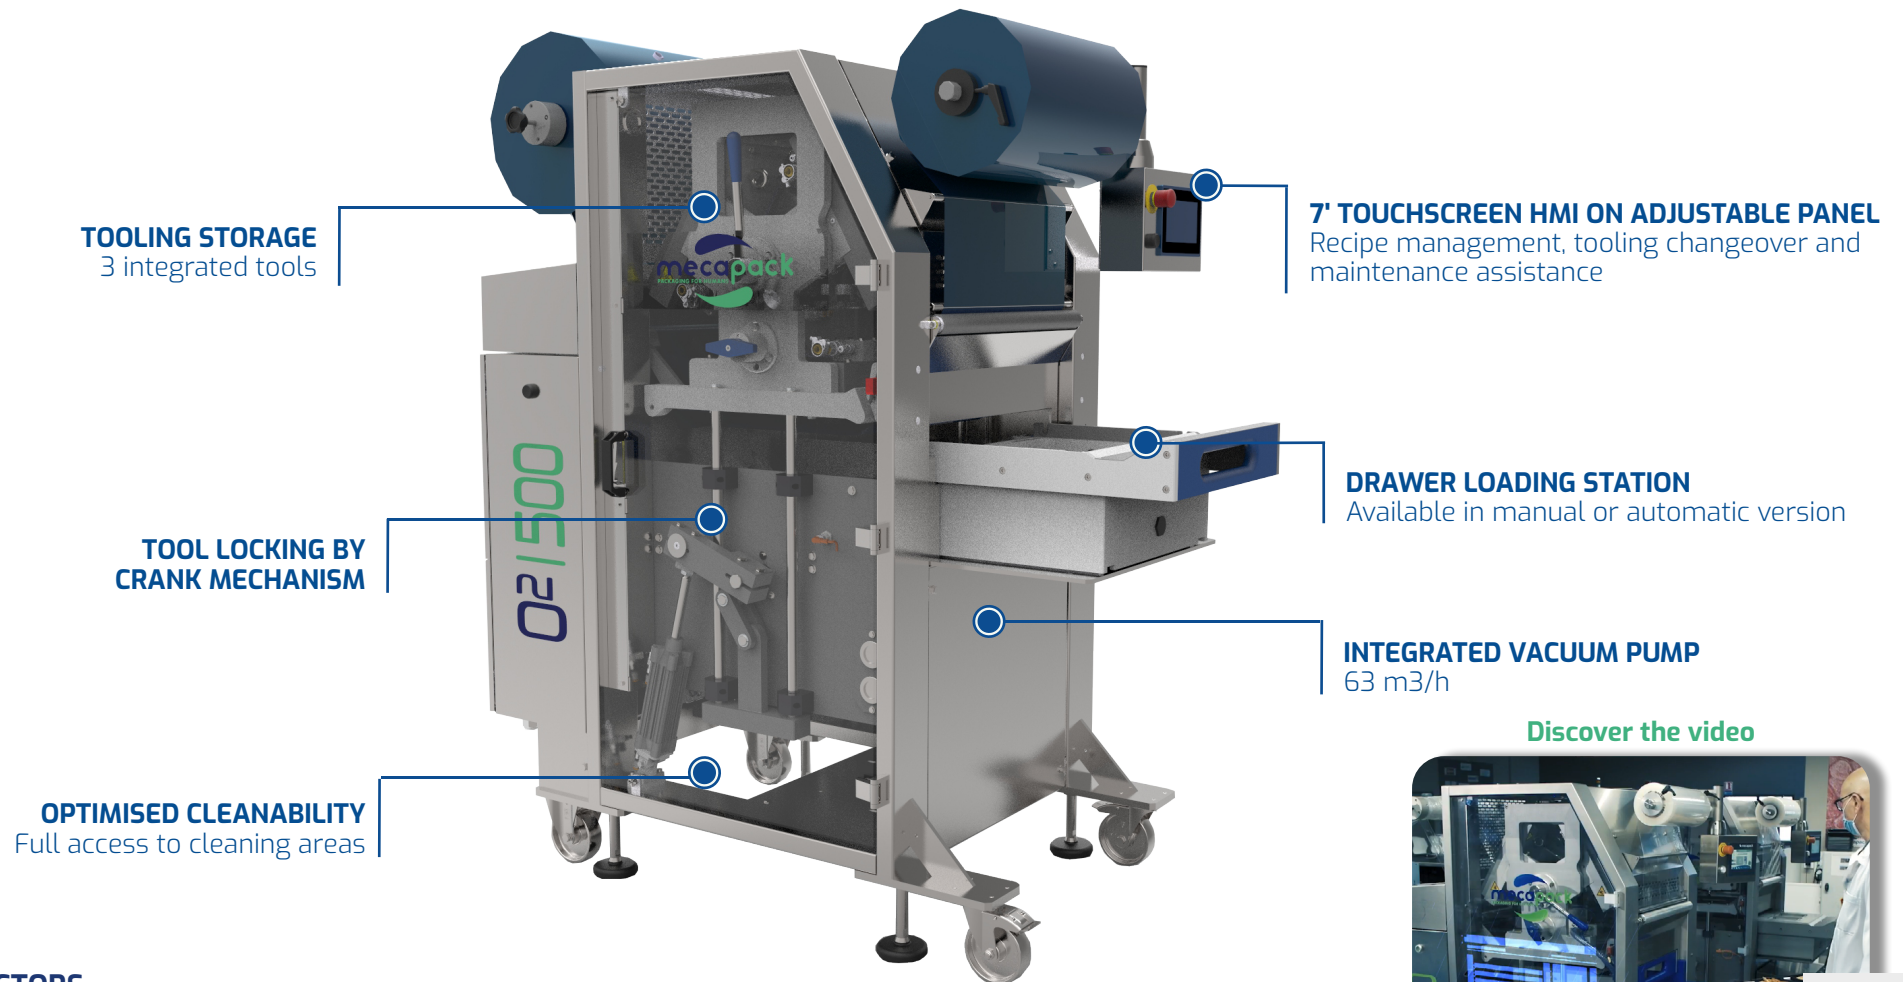

Discover the video



SECTORS



O² 1500

The compact and versatile tray sealer.

Ideal for small production volumes, the O² 1500 efficiently supports start-up phases and the launch of new products or markets, particularly in laboratory environments.

Its optimised ergonomics – easy format changeover without adjustment, intuitive HMI and mobility on wheels – make it an agile solution, with the possibility to upgrade to an O² 2500 as the project develops.

CONFIGURATIONS :

BASIC : Articulated platen

FORMAT CHANGEOVER : 10 min

(handling + heating)

FLEX : Store 3 tools

FORMAT CHANGEOVER : 3 min

(handling + heating)

TRAY CAPACITY :

Pocket number	1	2	3	4	2x1	2x2	2x3	4x4	OUTPUT : 3 to 5 CYCLES PER MINUTE
Length (mm)	420	325	325	325	420	200	150	150	
Width (mm)	325	200	125	90	150	150	125	90	
Maximum height (mm)	130	130	130	130	130	130	130	130	

OUTPUT :

TOOLING COMPATIBILITY WITH : O² 2500 - O² 2500 TWIN



PACKAGING PROCESSES

SIMPLE SEAL, MAP BY VACUUM OR GAS
FLUSHING, SLICEPACK, VISIOPACK, SKIN :
DRAPING 50 MM AND PRODUCT PROTRUSION OF 25 MM



CUTTING PROCESSES

INSIDE CUT
OUTSIDE CUT



MATERIALS

PET, PP, PSE, PLA, CARDBOARD, CELLULOSE,
STAINLESS STEEL, ALUMINUM, GLASS,
CERAMIC, AND ALL TYPES OF CONTAINERS:
TRAYS, PLATES, SINGLE-USE AND REUSABLE, ...